



More information on the website
radwag.com/us/info,w1,Q67

WTC 200 Precision Balance



Functions



Plus/Minus Control



Percent Weighing



Parts counting



Peak hold



GLP Procedures



ALIBI Memory

Datasheet

Maximum capacity [Max]	200 g
Readability [d]	0,001 g
Tare range	-200 g
Repeatability	0,002 g
Linearity	±0,004 g
Stabilization time	2 s
Adjustment	external
Physical parameters	
Levelling system	manual

Physical parameters	
Display	LCD (backlit)
Weighing pan dimensions	ø100 mm
Packaging dimensions	330×230×140 mm
Net weight	1,3 kg
Gross weight	2 kg
Protection class	IP 43
Communication interface	RS232, USB-A, USB-B
Power supply	Adapter: 100-240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	15 h (average time)
Operating temperature	+15 ÷ +30 °C



Accessories

Cigarette lighter receptacle power supply cables
 Receipt Printer
 Displays



RS 232, RS 485 cables
 RS 232 cables (scale - EPSON printer)

Software

!RAD-KEY
 !LabVIEW Driver
 R-LAB

!RW Tool
 !R Panel
 !Scales Editor 2.0

Device dimensions

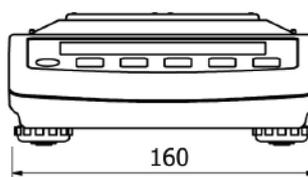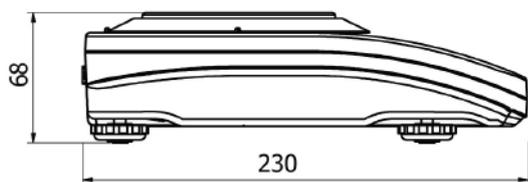

WTC, d = 0.001 g